




〈4極〉

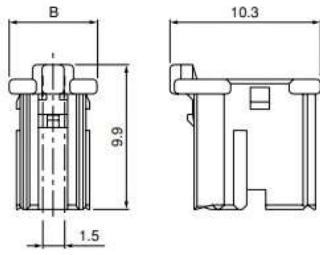


〈6極〉

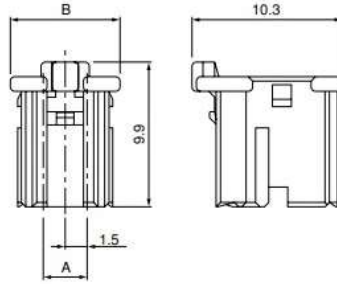


〈8～16極〉

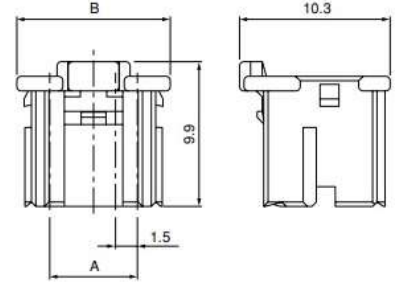

〈22～28極〉

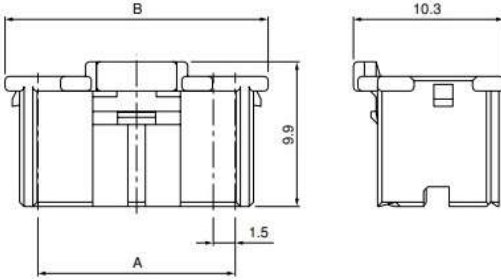

〈30～36極〉

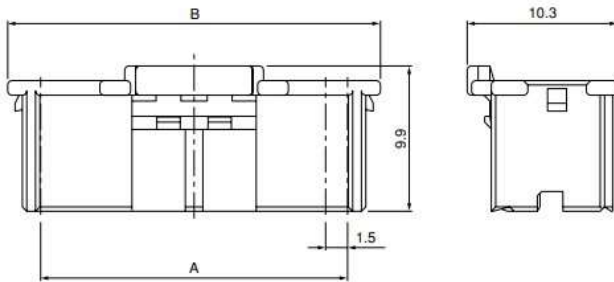

極数	形番	寸法 (mm)		個数/袋
		A	B	
4	ZNDP-04V-A-S	—	6.0	1,000
6	ZNDP-06V-A-S	3.0	7.5	1,000
8	ZNDP-08V-A-S	4.5	9.0	1,000
10	ZNDP-10V-A-S	6.0	10.5	1,000
14	ZNDP-14V-A-S	9.0	13.5	1,000
16	ZNDP-16V-A-S	10.5	15.0	1,000
22	ZNDP-22V-A-S	15.0	19.5	1,000
24	ZNDP-24V-A-S	16.5	21.0	1,000
26	ZNDP-26V-A-S	18.0	22.5	1,000
28	ZNDP-28V-A-S	19.5	24.0	1,000
30	ZNDP-30V-A-S	21.0	25.5	1,000
32	ZNDP-32V-A-S	22.5	27.0	1,000
34	ZNDP-34V-A-S	24.0	28.5	1,000
36	ZNDP-36V-A-S	25.5	30.0	1,000

材質

ガラス入ナイロン66・UL94V-0, ナチュラル

●RoHS2 対応品

ZND P - 04 V - A - S

シリーズ名

部品名称：プラグ

極数：4, 6, 8, 10, 14, 16, 22, 24, 26, 28, 30, 32, 34, 36極

難燃性表示：V...UL94V-0

キーパターン：A...キーパターンA

色表示：S...ナチュラル